



-
-
-
-
-
-
-
-
-
-

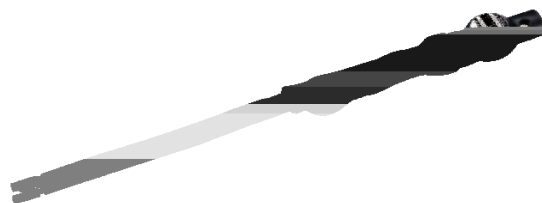


	277 Vac	-	480 Vac	
(MCOV) ⁽¹⁾	-	-	550 Vac	
	47 Hz	-	63 Hz	
(In) ⁽²⁾	-	-	10 kA	
(Imax) ⁽³⁾	-	-	20 kA	
(Uoc) ⁽⁴⁾	-	-	20 kV	
(L-N) ⁽⁵⁾	-	-	3000 V	20kV/10kA 1.2/50 μs 8/20 μs
(L-G N-G) ⁽⁵⁾	-	-	3000 V	20kV/10kA 1.2/50 μs 8/20 μs
20 kA 10 kA 4 kA 2 kA 1 kA	1 15 100 500 1000	- - - - -	- - - - -	
	-	60 g	-	

	-40 °C	-	+85 °C	
	-40 °C	-	+85 °C	≤ 75%RH
	-10 °C	-	+40 °C	≤ 75%RH

UL/CUL	UL 1449: Transient Voltage Surge Suppressors, CSA-C22.2 No. 269.5
IEEE C62.41	Guide on the Surge Environment in Low-Voltage (1000 V and Less) AC Power Circuits

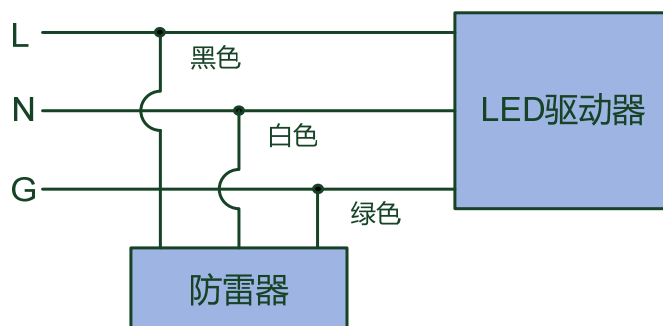

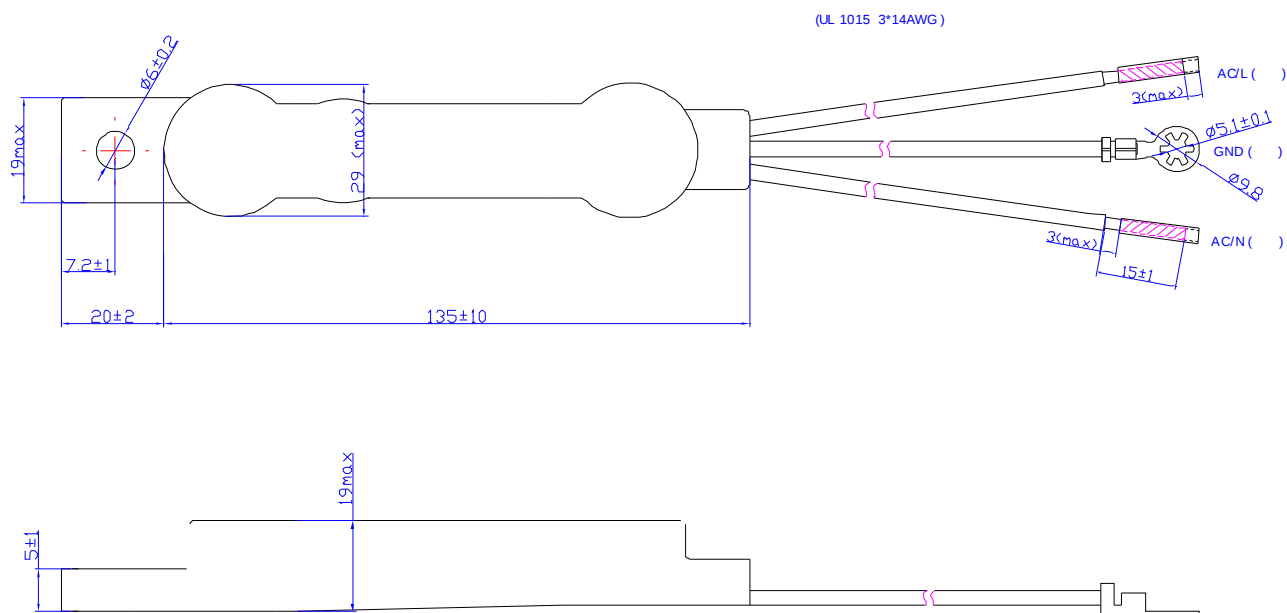

2018-03-30	A		/	/
2018-04-20	B		/	
2018-08-28	C		/	